

# 80 PLUS Verification and Testing Report




<b>TYPICAL EFFICIENCY (50% Load):</b>	<b>84.74%</b>
<b>AVERAGE EFFICIENCY :</b>	<b>82.85%</b>
<b>80 PLUS COMPLIANT:</b>	<b>YES</b>

<b>Ecos ID #</b>	535.2
<b>Manufacturer</b>	Everest
<b>Model Number</b>	Everest 80 Plus 700
<b>Serial Number</b>	NA
<b>Year</b>	2008
<b>Type</b>	ATX12V & EPS12V
<b>Test Date</b>	3/6/2008



Rated Specifications	Value	Units
Input Voltage	100-240	Volts
Input Current	11	Amps
Input Frequency	50-60	Hz
<b>Rated Output Power</b>	<b>700</b>	<b>Watts</b>

Note: All measurements were taken with input voltage at 115 V nominal and 60 Hz.

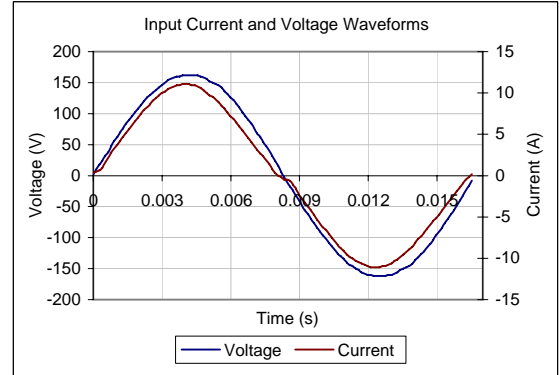

Input AC Current Waveform (ITHD = 12.61%, 50% Load)

I <sub>RMS</sub> A	PF	I <sub>THD</sub> (%)	Load (%)	Fraction of Load	Input Watts	DC Terminal Voltage (V)/ DC Load Current (A)					Output Watts	Efficiency %
						12V (cumulative of 12V1, 12V2, etc.)	-12V	3.3V	5V*	5VSB		
1.51	0.98	18.6%	20%	Light	170	12.1/8.7	12.2/0.2	3.3/4.1	5.1/3.4	5.1/0.6	142	83.72%
3.66	0.99	12.6%	50%	Typical	417	12.1/21.8	12.3/0.4	3.2/10.4	5/8.6	4.9/1.5	353	84.74%
7.58	1.00	7.5%	100%	Full	869	12/43.5	12.3/0.8	3.1/20.6	4.9/17.3	4.7/3.1	696	80.10%

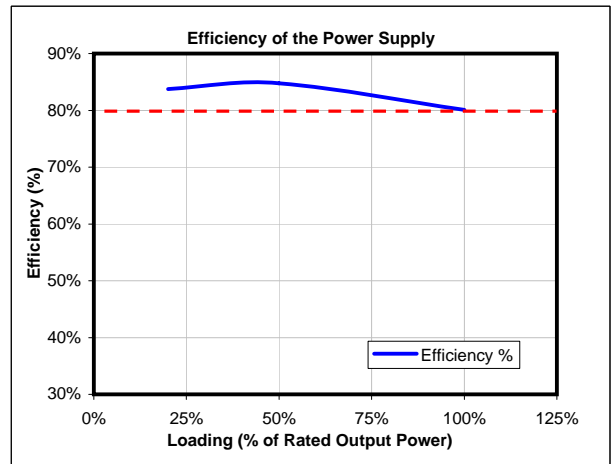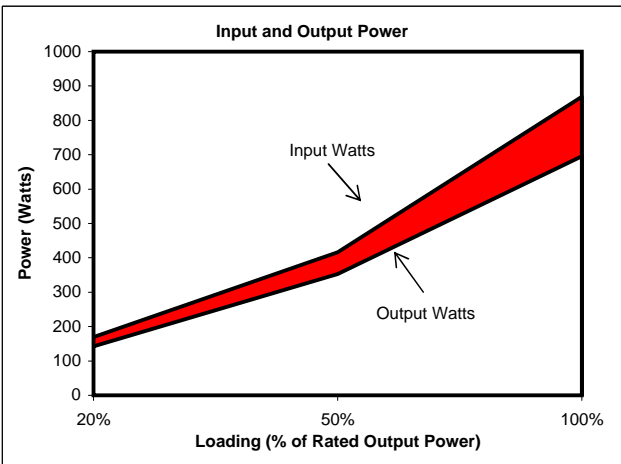

These tests were conducted by a third party independent testing firm on behalf of the 80 PLUS® Program. 80 PLUS is a certification program to promote highly-efficient power supplies (greater than 80% efficiency in the active mode) in technology applications. <http://www.80plus.org/>

